

## Area of Application

ESSVE Self-drilling screw without bonded washer designed for installing the sheet-metal on beams, sheet-metal on light beams, etc., indoors/outdoors.

## Description

The screw is produced in hardened carbon steel with bright zinc plated or C4 class Silver


## Specification

CorrSeal surface treatment. It is equipped with hex head.

The screw is self drilling and tapping.

## Installation

A screwdriver with a depth stop should be used for quick and efficient installation. Recommended rpm: 1200-2200/min.

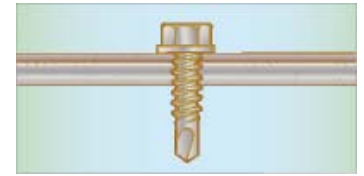

**CorrSeal**

ESSVE CorrSeal surface treatment.




Type approved by SITAC No. 0075/05

	Bright zinc plated	CorrSeal
Material	SAE1022	SAE1022
Surface treatment	Bright zinc plated 12 µm	Silver CorrSeal
Corrosion categories	C1	C4

## Self-drilling screw without bonded washer, bright zinc-plated

### ESSBOX

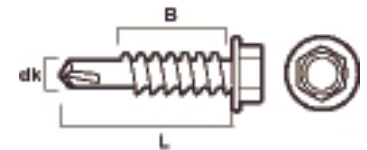

Item no.	Dimension dk x L mm	Drill capacity mm	B = Max. grip length mm	Key width mm	ESSBOX size	Qty/pack.	Pack./large pack.
63420	4.8 x 19	1.5 - 3.0	15.0	8	202	250	12
63425	5.5 x 25	1.5 - 5.0	19.0	8	203	250	8
63432	5.5 x 32	1.5 - 5.0	26.0	8	203	200	8
63632	5.5 x 32	3.0 - 12.0	18.0	8	203	200	8
63627	5.5 x 38	1.5 - 5.0	32.0	8	204	200	6
63630	5.5 x 50	1.5 - 5.0	44.0	8	204	150	6
63631	5.5 x 75	1.5 - 5.0	69.0	8	204	100	6
63628	6.3 x 25	1.5 - 6.0	20.0	8	204	250	6
63629	6.3 x 38	1.5 - 6.0	33.0	8	204	200	6
63633	6.3 x 50	1.5 - 6.0	45.0	8	204	150	6
63636	6.3 x 63	1.5 - 6.0	58.0	8	304	100	4
63637	6.3 x 75	1.5 - 6.0	70.0	8	304	100	4
63639	6.3 x 100	1.5 - 6.0	95.0	8	304	100	4